


Type Number..... 4034
Designation IEC..... 4LR44
System..... Manganese Dioxide/
 Zinc/KOH-Electrolyte

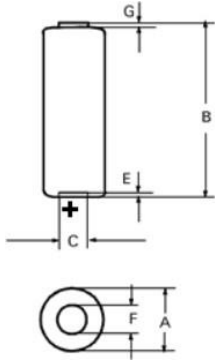

Nominal Voltage..... 6,0 V
Typical Capacity C..... 170 mAh
 Load 20k Ω , at 20°C down to 3.60 V

Weight (approx.)..... 9,83 g
Volume..... 3,3 ccm
Coding..... Manufacturing Month/Year
 by Letter Code

Temperature Ranges

	min	max.
Storage.....	-10°C	65°C
Discharge.....	-10°C	65°C

Dimensions

	min	max.
Diameter.(A).....	12,50	13,00
Height (B).....	23,9	25,2
Shoulder Diameter (F)	6,50	
Shoulder Height (G)	0,70	

Typical Capacities (at 20°C)

Discharge Type	Load	End Voltage:	3.60 V
Continuous 24h/d, 7d/w	20000 Ω	Time:	670 h
		Capacity:	170 mAh
		Energy:	890 mWh

No publication or circulation of data to third parties without consent of VARTA Consumer Batteries

All Data contained herein is for single cells
 For battery applications, performance data may vary from single cell data, depending on specific battery configuration