

DURACELL®


PHOTO

ULTRA

Ultra 245


Lithium/Manganese Dioxide

Li/MnO₂

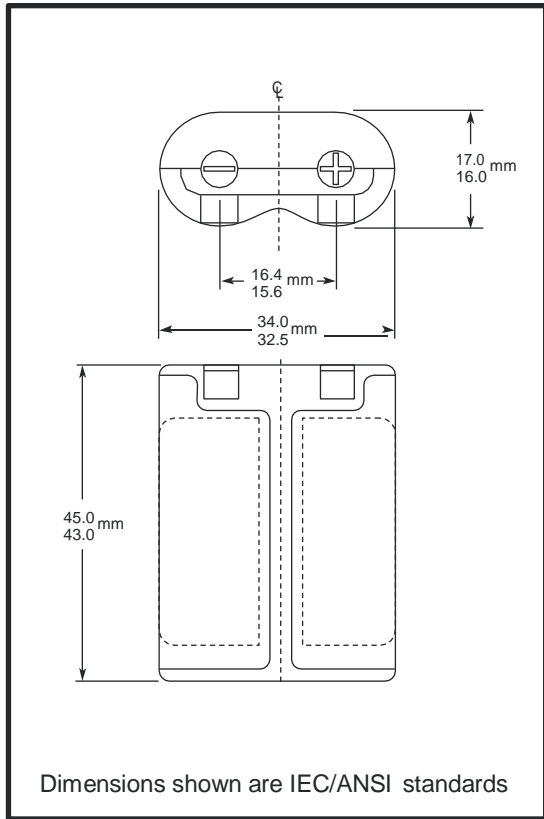


Nominal Voltage:	6 V
Typical Voltage:	6.4-6.6 V
Nominal Internal Impedance:	0.45 ohm @ 1kHz
Average Weight:	38.6 gm
Typical Volume:	24.1 cm ³
Terminals:	Flat, Recessed Contacts Nickel Plated Steel
Operating Temperature Range:	-20°C to 75°C (-4 F to 167 F)
ANSI	5032LC
: IEC:	2CR5

Delivered Energy vs. Power Drain
 @ Various Cutoff Voltage - Room Temperature

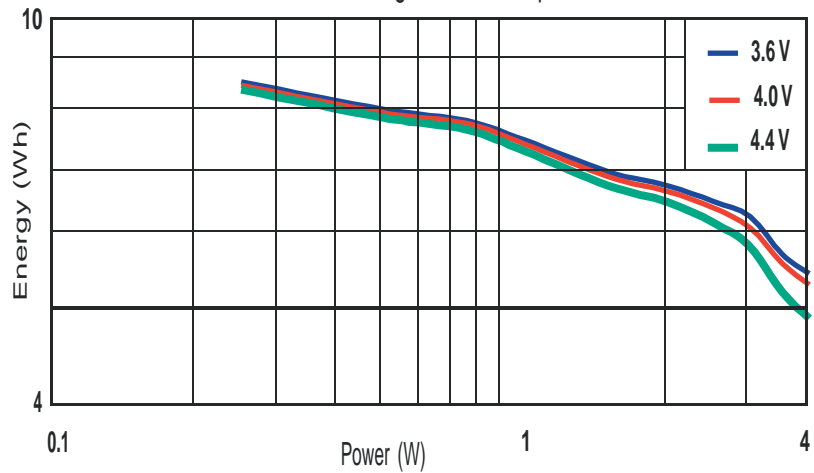


Duracell Ultra 245 Typical Performance

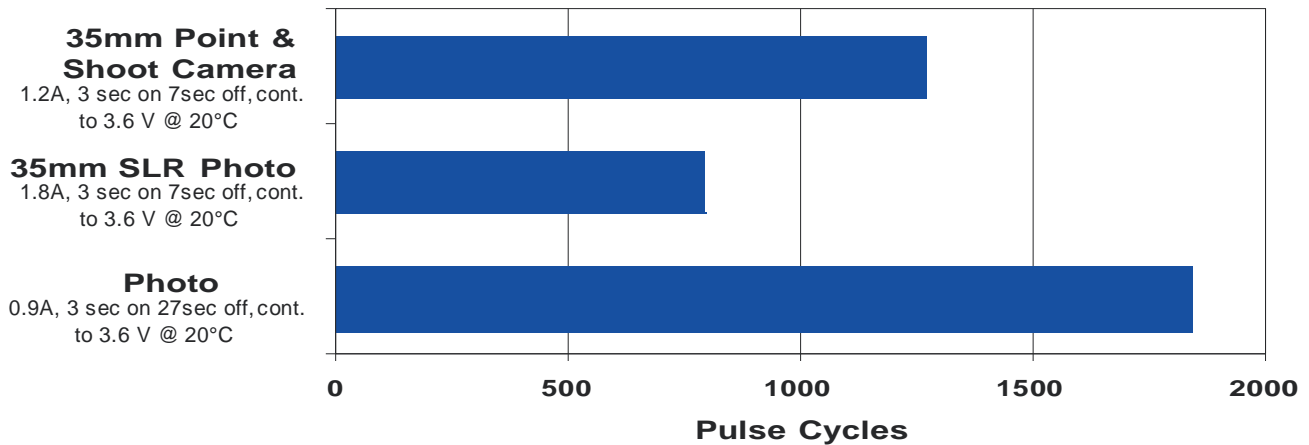


* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


0.9 Amp, 3 sec on/27 sec off
@ Various Temperatures

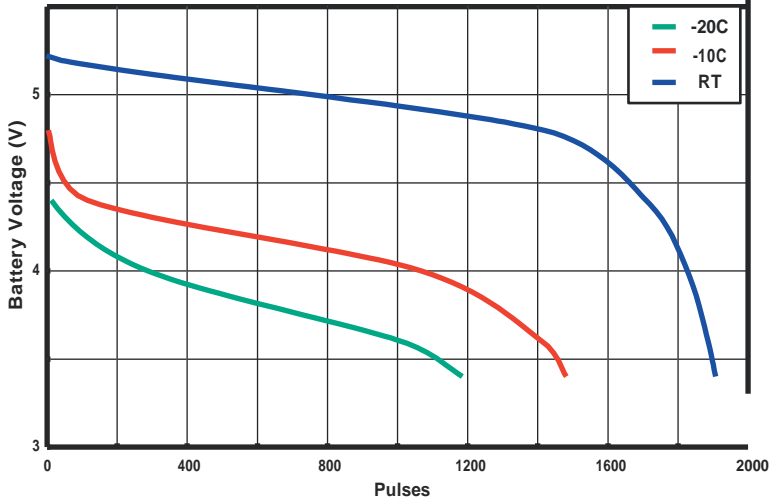


1.8 Amp 3 sec on/7 sec off
@ Various Temperatures

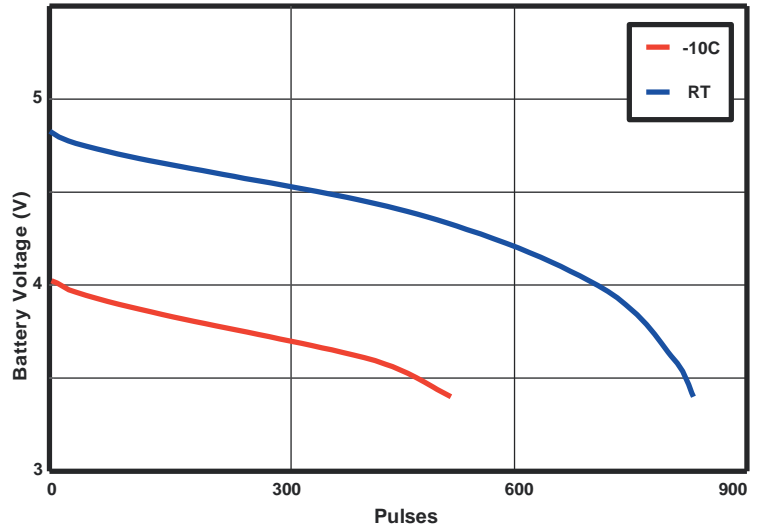

Continuous Discharge
RT to 3.4 Volts

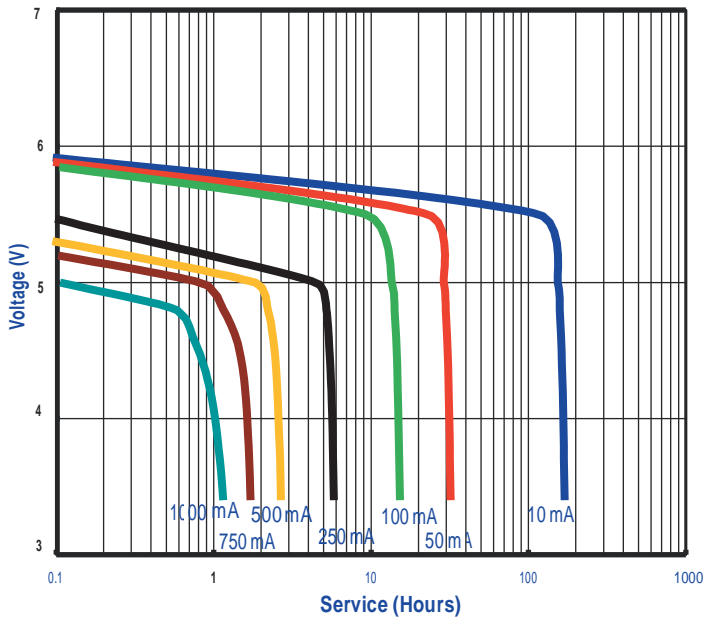

1.2 Amp, 3 sec on/7 sec off
@ Various Temperatures

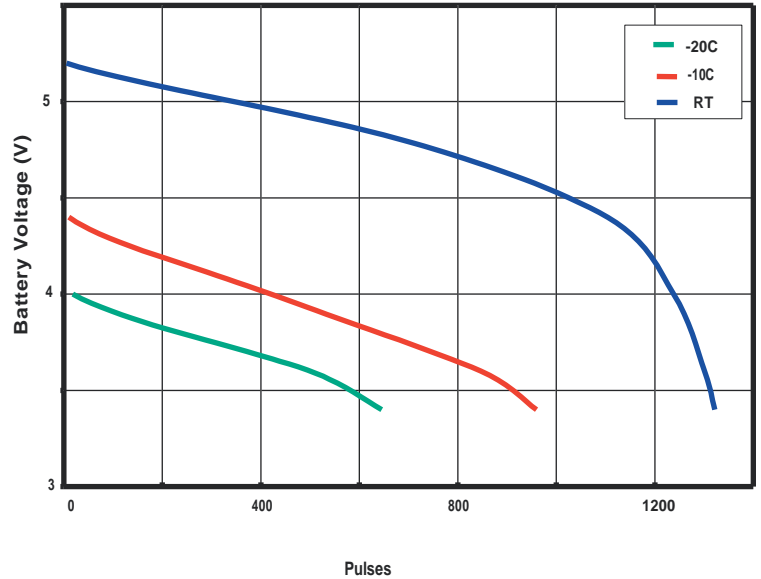

DURACELL[®]
BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 111-888-0000/5445454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.