



| | |
|------------------------------------|---|
| Nominal Voltage: | 3.0 V |
| Typical Voltage: | 3.2-3.3 V |
| Nominal Internal Impedance: | 0.3 ohm @ 1kHz |
| Average Weight: | 11 g |
| Volume: | 5.168 cm. ³ |
| Terminals: | Flat, Recessed Negative Terminal, Nickel Plated Steel |
| Operating Temp. Range: | -20°C to 75°C (-4°F to 167°F) |
| NEDA/ANSI: | CR2 |
| IEC: | - |

Delivered Energy vs. Power Drain
@ Various Cutoff Voltage - Room Temperature

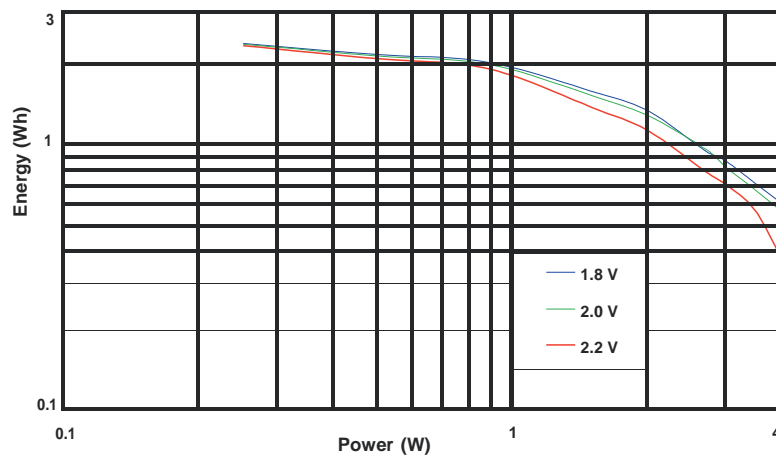


Duracell Ultra CR2 Typical Performance


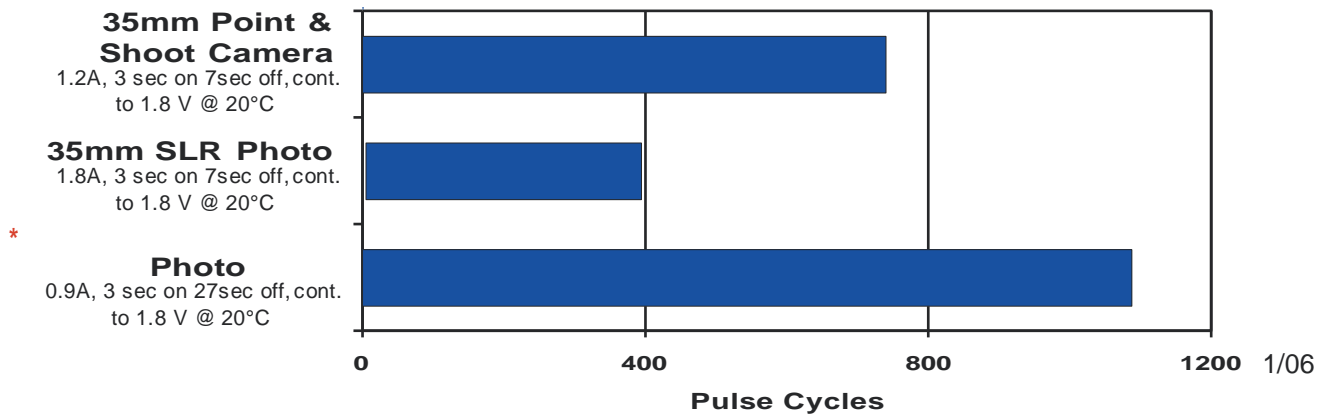


* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy/service life that the battery will provide for various load conditions.


1.8 Amp 3 sec on/ 7 sec off
@ Various Temperatures

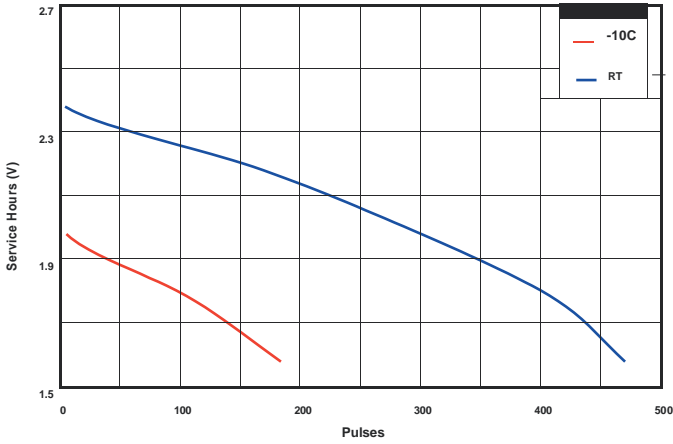

1.2 Amp, 3 sec on/ 7 sec off
@ Various Temperatures

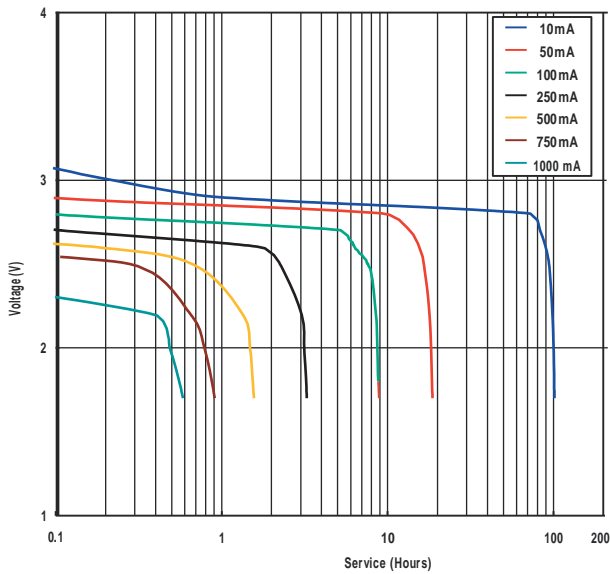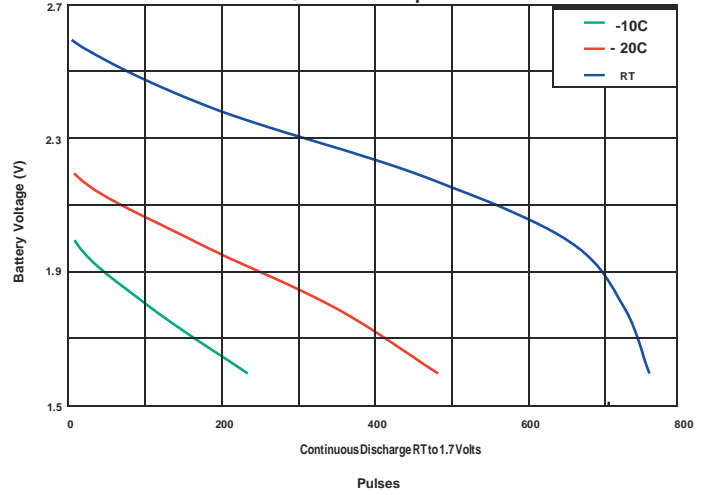

0.9 Amp, 3 sec on/27 sec off
@ Various Temperatures

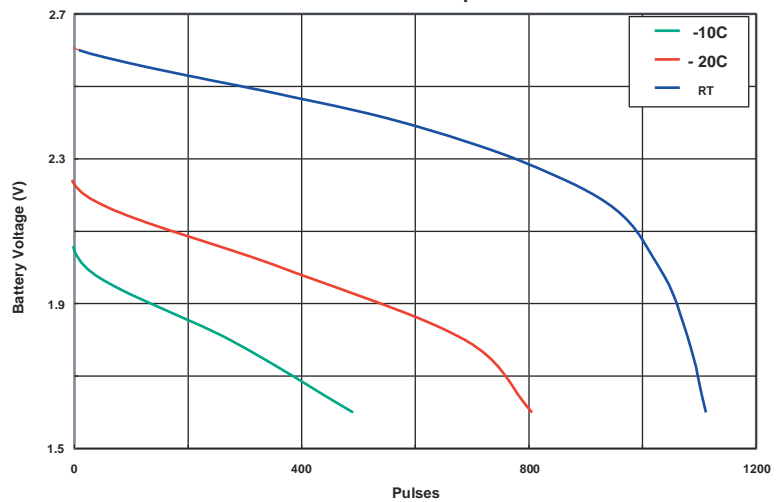

DURACELL[®]

BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 111-888-0000 5445454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide for various load conditions.