


# DURACELL®

2430  
Size: CR2430


Zn/MnO<sub>2</sub>

## Lithium-Manganese Dioxide Battery

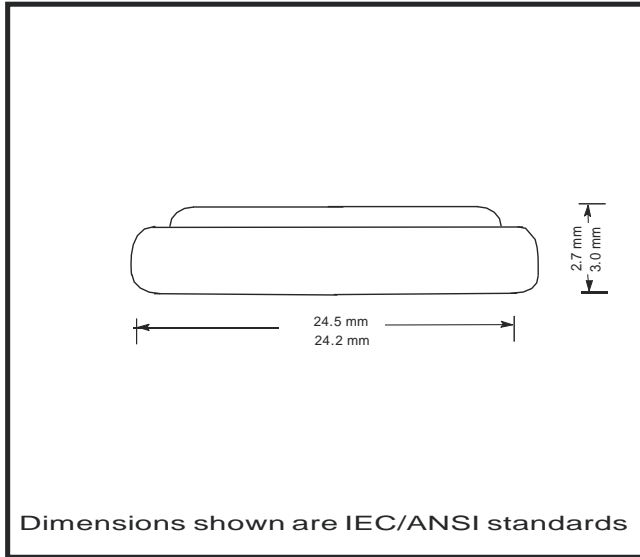

Nominal Voltage:	3 V
Average Weight:	4.6 gm (0.16 oz.)
Volume:	1.33 cm <sup>3</sup> (0.08 in. <sup>3</sup> )
Terminals:	Flat
Operating Temperature Range:	-20 °C to 54 °C (-4 °F to 130 °F)
ANSI:	5011LC
IEC:	CR 2430

Typical Discharge Characteristics at 21 °C (70 °F)

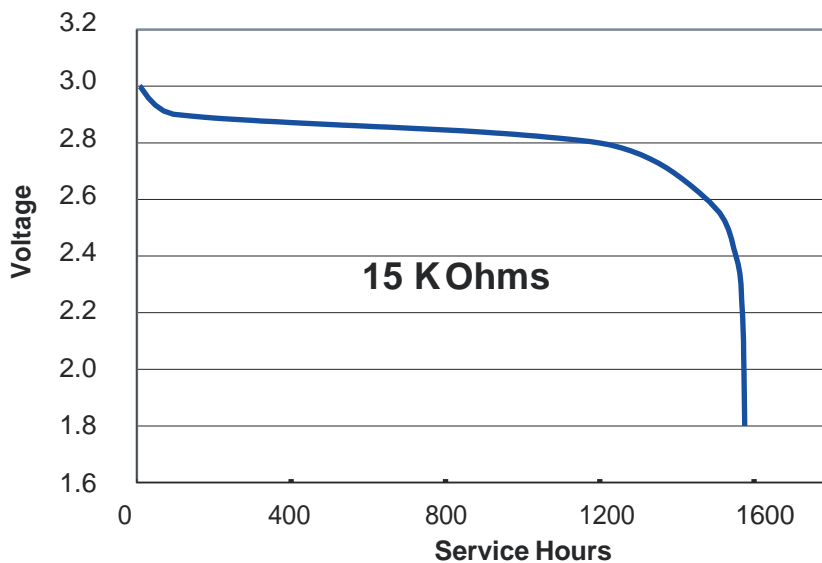

### DURACELL® BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide.