


DURACELL®

2450
Size: CR2450


Zn/MnO₂

Lithium-Manganese Dioxide Battery

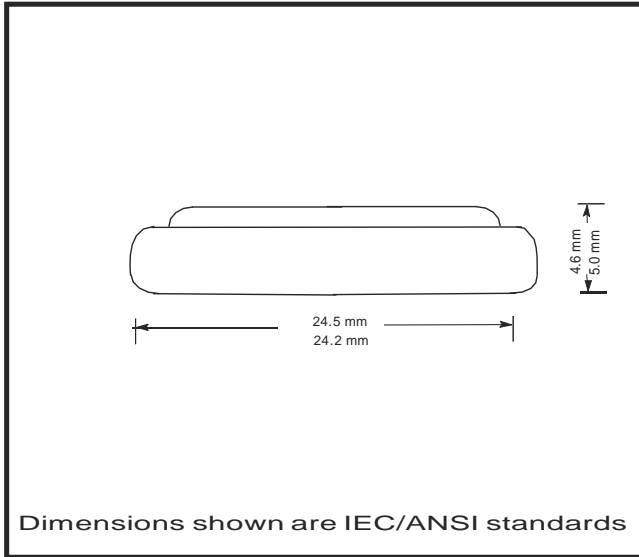

Nominal Voltage:	3 V
Average Weight:	6.6 gm (0.23 oz.)
Volume:	2.24 cm ³ (0.14 in. ³)
Terminals:	Flat
Operating Temperature Range:	-20 °C to 54 °C (-4 °F to 130 °F)
ANSI:	5029LC
IEC:	CR 2450

Typical Discharge Characteristics at 21 °C (70 °F)

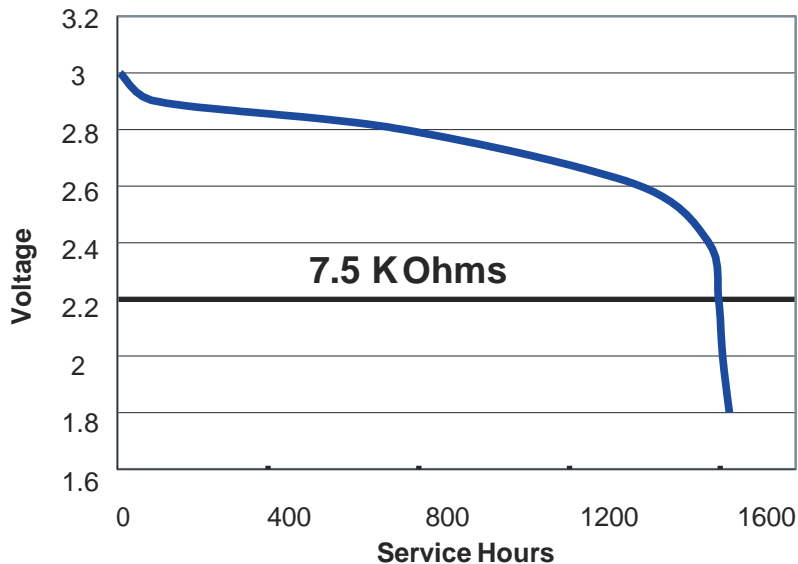

DURACELL® BATTERIES

Berkshire Corporate Park
Bethel, CT 06801 U.S.A.
Telephone: Toll-free 1-800-544-5454
Internet: www.duracell.com

* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide.