


|                              |                                |
|------------------------------|--------------------------------|
| Nominal Voltage:             | 1.4 V                          |
| Rated Capacity:              | 95 mAh at 3000 ohm to 1.1 V    |
| Nominal Internal             | 16 ohm @ 1kHz                  |
| Average Weight:              | 0.3 gm                         |
| Volume:                      | 0.06 cm <sup>3</sup>           |
| Terminals:                   | Flat                           |
| Operating Temperature Range: | 0 C to 50 C<br>(32 F to 122 F) |
| ANSI:                        | 7005 ZD                        |
| IEC:                         | PR70                           |

### Typical Discharge Characteristics at 21°C (70°F)

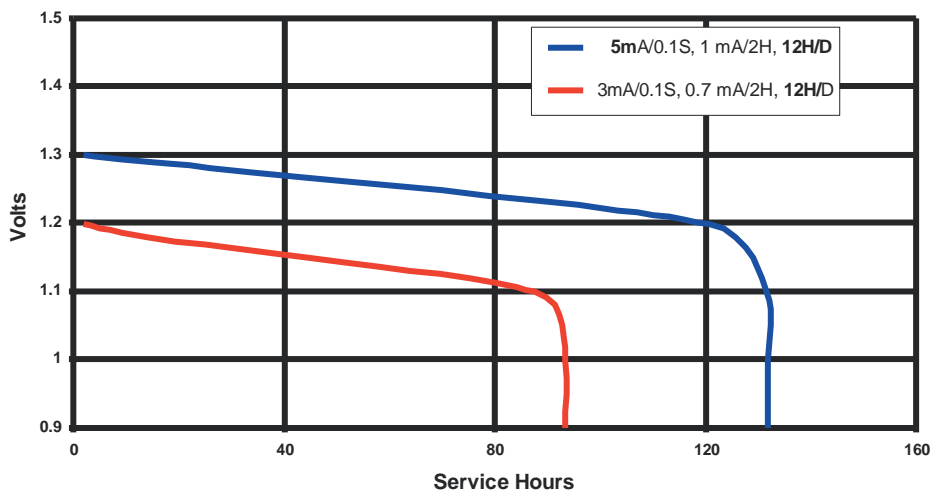

## DURACELL® BATTERIES

Berkshire Corporate Park  
Bethel, CT 06801 U.S.A.  
Telephone: Toll-free 1-800-544-5454  
Internet: [www.duracell.com](http://www.duracell.com)

\* Delivered capacity is dependent on the applied load, operating temperature and cut-off voltage. Please refer to the charts and discharge data shown for examples of the energy / service life that the battery will provide.